

GLASIMO[®]

glass interiors



find us on



MINI-CATALOGUE
BALUSTRADES

www.glasimo.eu

Side-mounted

U-PROFILE



PROFILE 4



Top-mounted

Ud-PROFILE



UL-PROFILE



A glass balustrade is mounted in an aluminium profile, which is the only element that fixes the glass. Classic elegance, stability and durability – these are the features distinguishing this type of balustrades.

Aluminium profile ensures mounting of all-glass balustrades to the reinforced concrete base. It can be used for private and public buildings in the range of top rail load-bearing capacity from 0.5 to 1.5 kN.

Glass with the specified thickness of 66.2, 88.2, 1010.4 can be used for the balustrade profile. Glass is selected depending on the utility requirements of the building.

Aluminium profiles are suitable for indoor and outdoor installation. The static strength analyses conducted in accordance with PN-EN standards confirm its good strength performance and ensure safe use.

★ PREMIUM PRODUCTS ★

Neat fittings

Novelty on the market




Digital Print




Digital printing with vitreous enamel on glass



SentryGlas foil

Safety and resistance of laminated glass

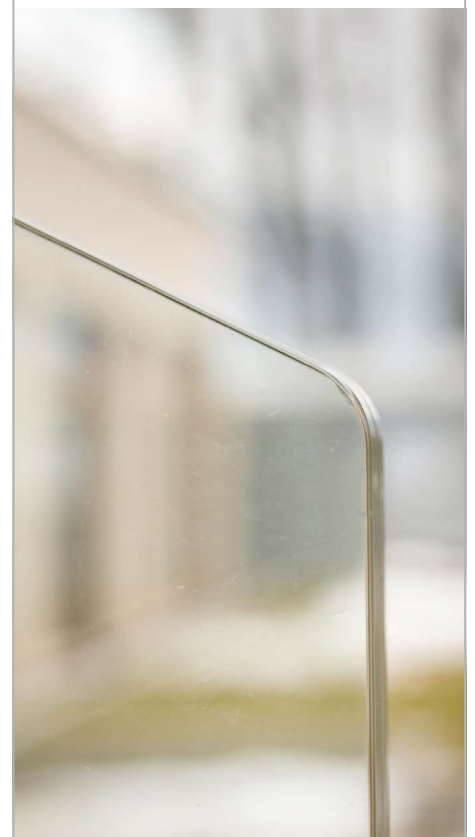

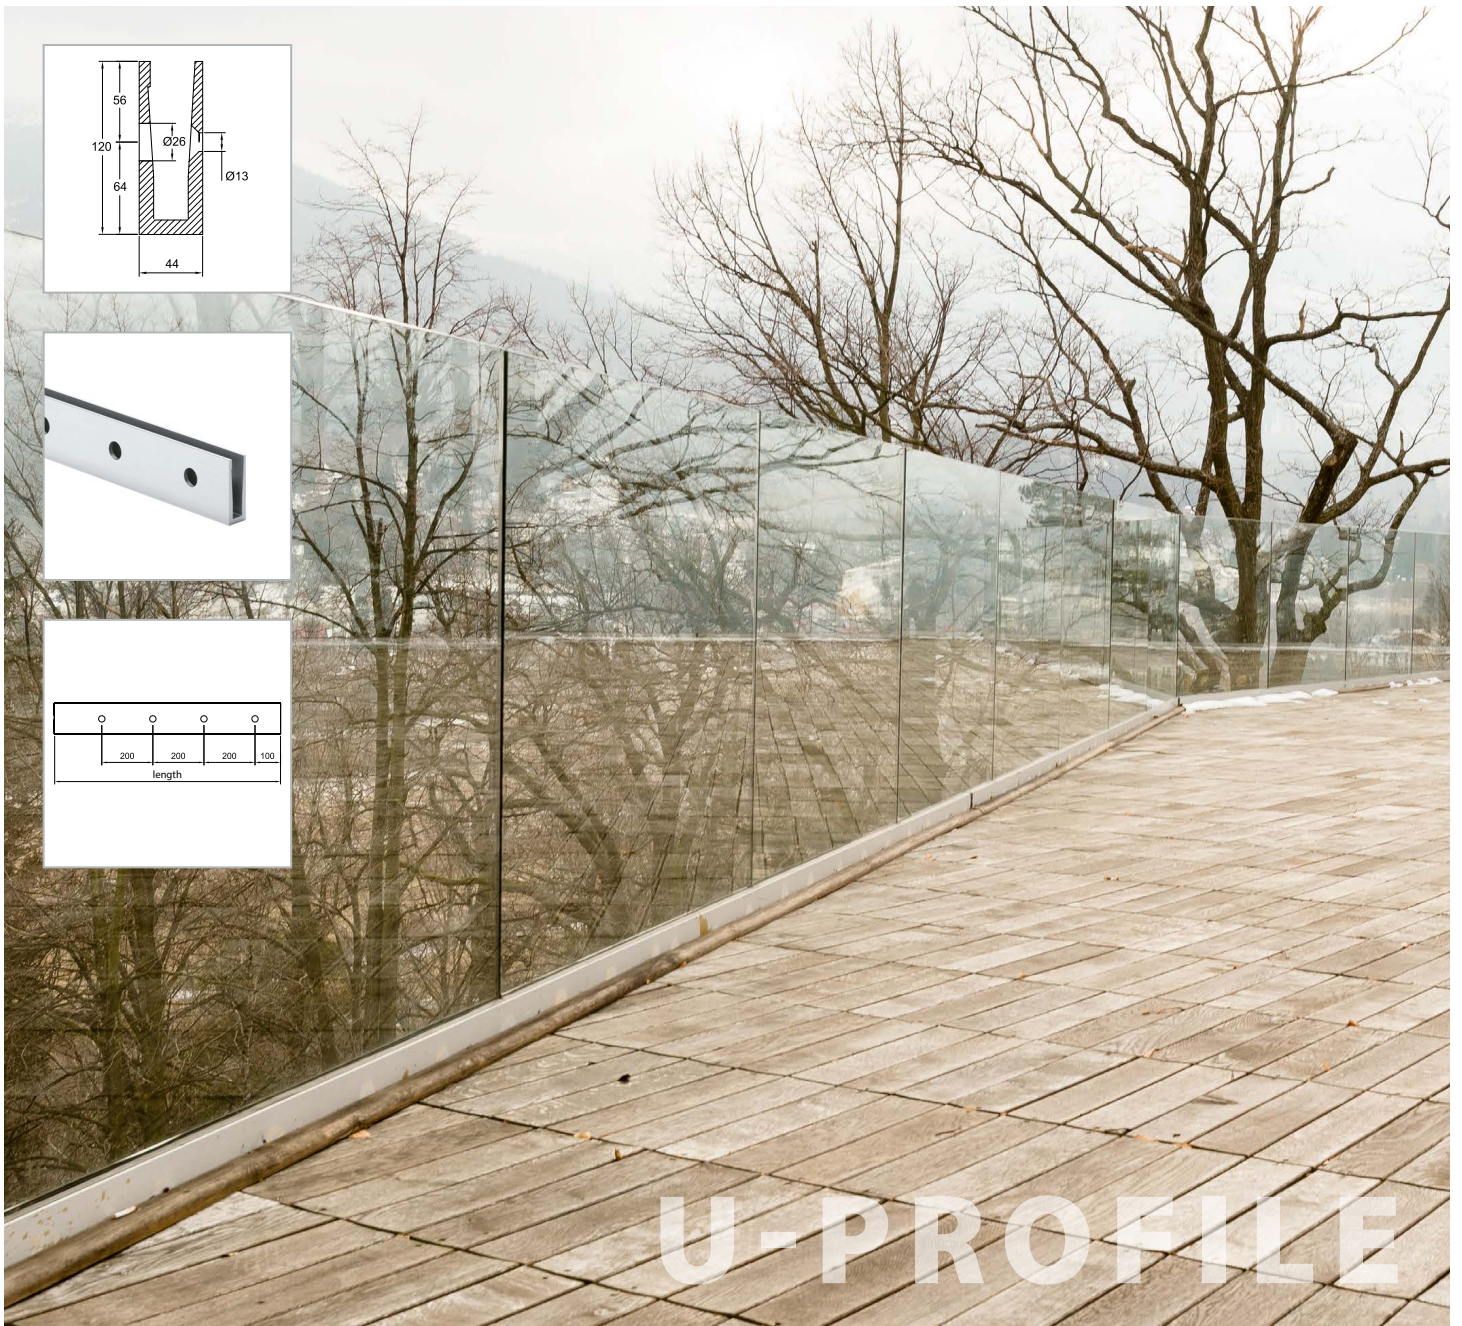

U-PROFILE

CHARACTERISTICS




LOAD	GLASS THICKNESS	LENGTH	WEIGHT	MATERIAL	SURFACE
0.5 - 1.0 kN	12.76 mm - 21.52 mm	3000 mm / 6000 mm	Approx. 6.17 kg	Aluminium EN AW-6063	Anodised: natural; black*; brush finish

*available on request


INSTALLATION ACCESSORIES



Set of seals and washers



Cover cap



Edge protection



Railing



Trimming service



Ud-PROFILE

CHARACTERISTICS



LOAD	GLASS THICKNESS	LENGTH	WEIGHT	MATERIAL	SURFACE
0.5 - 1.0 kN	12.76 mm - 21.52 mm	3000 mm / 6000 mm	Approx. 6.17 kg	Aluminium EN AW-6063	Anodised: natural; black*; brush finish

*available on request

INSTALLATION ACCESSORIES



Set of seals and washers





Edge protection



Railing



Trimming service



UL-PROFILE

CHARACTERISTICS




LOAD	GLASS THICKNESS	LENGTH	WEIGHT	MATERIAL	SURFACE
0.5 - 1.5 kN	12.76 mm - 21.52 mm	3000 mm / 6000 mm	Approx. 8.35 kg	Aluminium EN AW-6063	Anodised: natural; black*; brush finish

*available on request

INSTALLATION ACCESSORIES



Set of seals and washers





Edge protection



Railing



Trimming service



CHARACTERISTICS




LOAD	GLASS THICKNESS	LENGTH	WEIGHT	MATERIAL	SURFACE
0.5 - 1.5 kN	12.76 mm - 21.52 mm	3000 mm / 6000 mm	Approx. 10.06 kg	Aluminium EN AW-6063	Anodised: natural; black*; brush finish

*available on request


INSTALLATION ACCESSORIES



Set of seals and washers



Cover cap



Edge protection



Railing



Trimming service